




PLASTIC REBAR CLIP



CELEBRATED ENTERPRISE IN CATHODIC PROTECTION

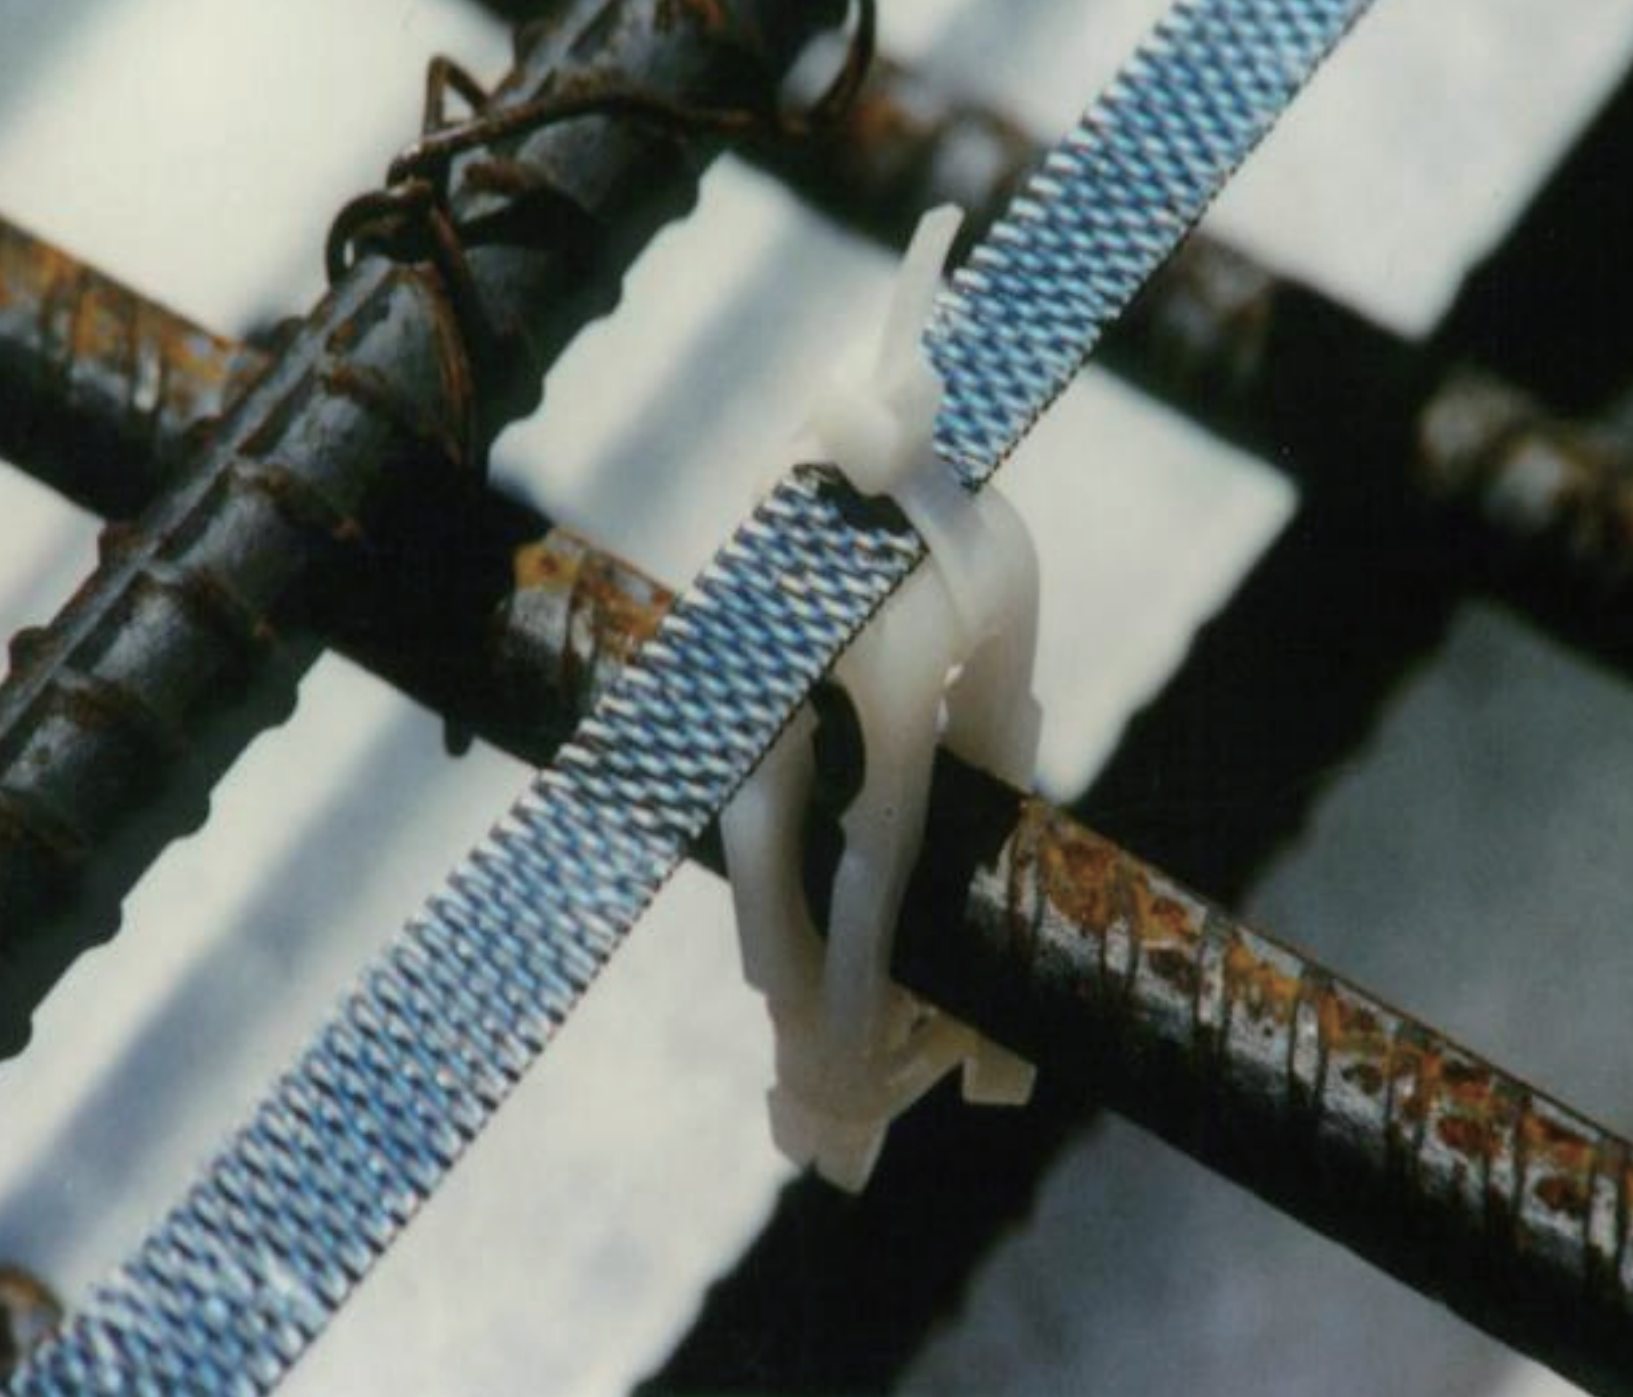


PLASTIC REBAR CLIP

DATA SHEET


Our plastic rebar clip is made of polycaprolactam, used for preventing electrical short circuits between MMO mesh ribbon anodes and reinforcing rebar. Using plastic cable tie can keep more stable for the anode.

MATERIAL


Technical Measurement	Standard	Confirmation Method
Water Content (mass fraction)	0.06% max	Q/SH 1130 301-2018
Low Molecular Material Content	0.6 max	Q/SH 1130 301-2018

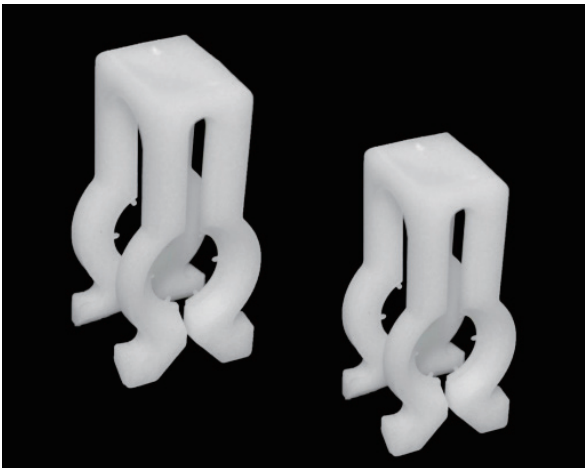

SPECIFICATIONS

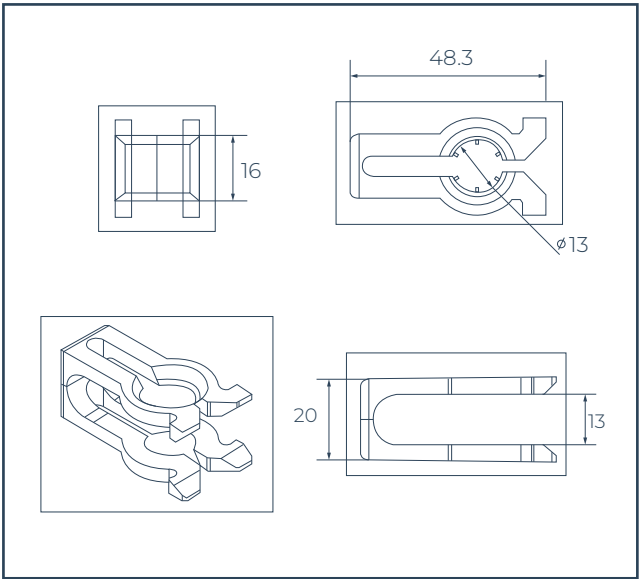


Small Size (Suitable for 12-16mm rebar)

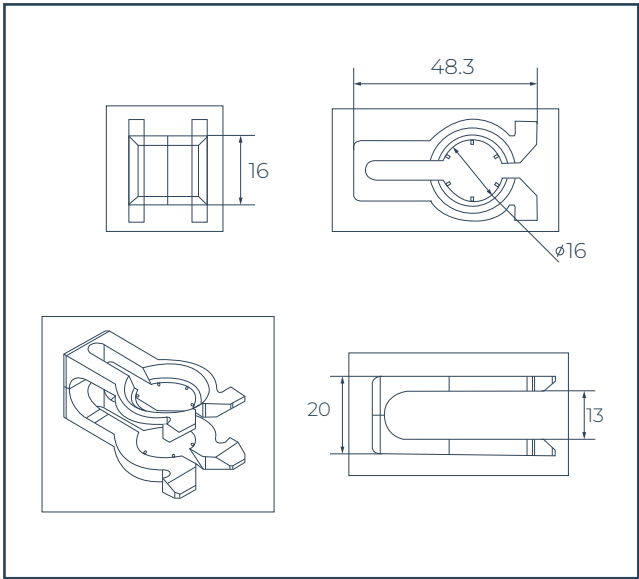


Standard Size (Suitable for 16-20mm rebar)

PLASTIC REBAR CLIP


DATA SHEET

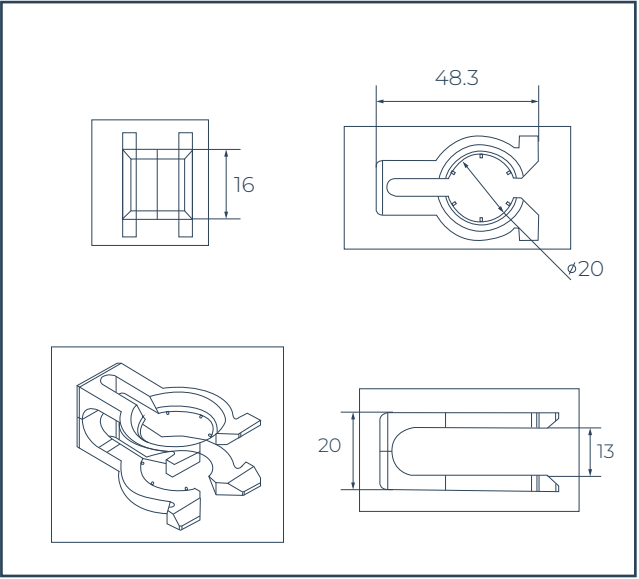

Medium Size (Suitable for 20-25mm rebar)

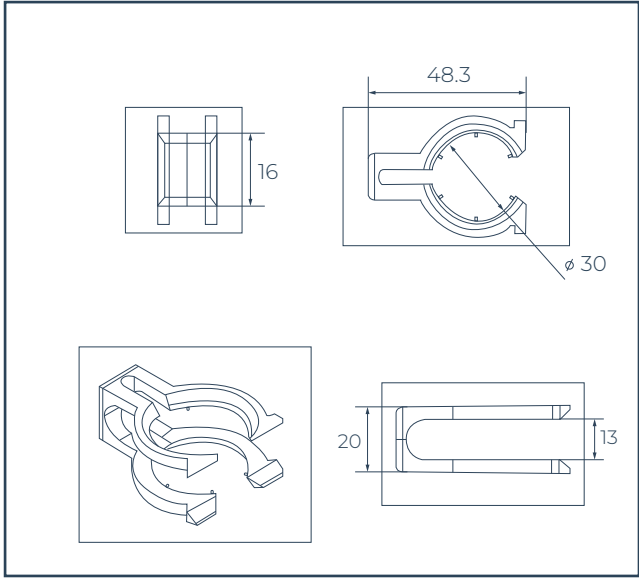

Large Size (Suitable for 30-35mm rebar)

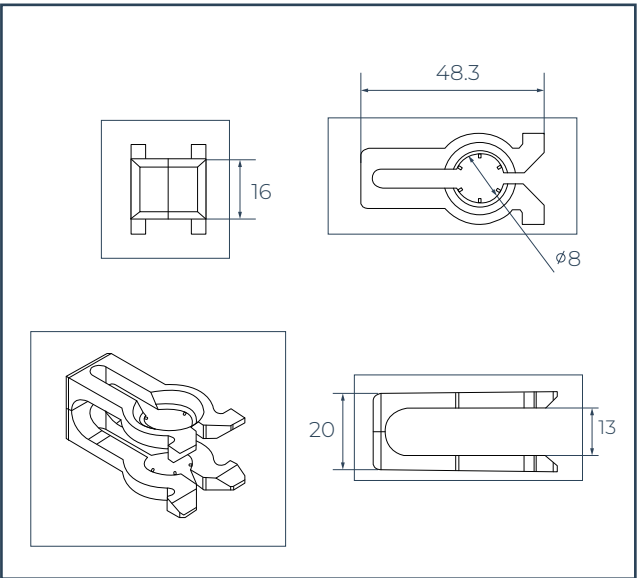

Mini Size (Suitable for 8-12mm rebar)



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

2417 Katy Fort Bend Road,
Katy, Texas 77493
United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland
SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex
Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn