

JOINT SPLICING KIT

DATA SHEET


This splicing kit is the proven way to protect wire splices from moisture and corrosion. It is ideal for impressed current cathodic protection systems which anode cables need to be connected and sealed.



■ 2-Way Cable Splicing (Straight Through)




Plastic Shield
x 1



Epoxy
x 1



Insulation Tape
x 1




Cable Tie
x 2




Disposable Glove
x 1

■ 3-Way Cable Splicing (Y Branch)




Plastic Shield
x 1



Epoxy
x 1






Insulation Tape
x 1



Cable Tie
x 2



Disposable Glove
x 1

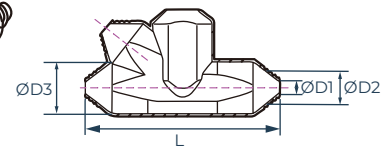

Item No.	Cable Way	Conductor Size	Plastic Shield Dimensions			
			D1	D2	D3	L
JA-SP-2	2	3/0 AWG (90 mm ²)	0.4" (10 mm)	0.9" (24 mm)	1.7" (44 mm)	5.7" (146 mm)
JA-SP-3	3	3/0 AWG (90 mm ²)	0.4" (10 mm)	0.9" (24 mm)	1.7" (44 mm)	5.9" (150 mm)



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

3115 Fry Road Ste 303, Katy, Texas
77449, United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland
SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex
Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn