



HEAT-SHRINKABLE END CAP



CELEBRATED ENTERPRISE IN CATHODIC PROTECTION



JENNINGS ANODES

HEAT-SHRINKABLE END CAP

DATA SHEET

Our heat-shrinkable end caps are designed for optimum water-proofing and environmental protection of wire terminations. The sleeve is made of polyvinylidene fluoride (PVDF) which resists external abrasion and the erosion of most chemical substances. The internal surface is coated with hot melt adhesive which can completely seal the nozzle after heat shrinkage and protect against moisture ingress. With excellent thermal stability and watertight sealing, our heat-shrinkable caps are available for underwater, underground and outdoor applications.




TYPICAL PROPERTIES

Technical Measurement	Test Method	Test Method
Density	ASTM D-792	1.05
Tensile Strength	ASTM D-638	> 14 MPa
Dielectric Strength	IEC 243	> 15 kV/mm
Volume Resistivity	IEC 93	> 10 ¹⁴ Ω·cm
Elongation at Break	ASTM D-638	> 400%
Elongation at Break After Thermal Aging	150°C / 168 hrs.	> 300%
Shrink Temperature	/	110 °C ~ 130 °C
Working Temperature	IEC 216	-55 °C ~ +110 °C

HEAT-SHRINKABLE END CAP

DATA SHEET

SPECIFICATION

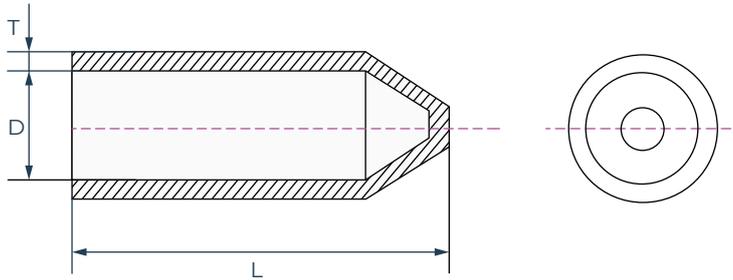

Item No.	Sleeve Diameter (Min.)	Shrunk Diameter (Max.)	Sleeve Length (±10%)	Shrunk Wall Thickness	Compatible Cable Diameter
JA-HSC-12	0.5" (12 mm)	0.16" (4 mm)	1.6" (40 mm)	0.1" (2.6 mm)	0.16"~0.4" (4~10 mm)
JA-HSC-14	0.6" (14 mm)	0.2" (5 mm)	1.8" (45 mm)	0.09" (2.2 mm)	0.2"~0.5" (5~12 mm)
JA-HSC-20	0.8" (20 mm)	0.24" (6 mm)	2.2" (55 mm)	0.11" (2.8 mm)	0.24"~0.6" (6~16 mm)
JA-HSC-25	1" (25 mm)	0.33" (8.5 mm)	2.7" (68 mm)	0.11" (2.8 mm)	0.3"~0.8" (8.5~20 mm)
JA-HSC-30	1.4" (35 mm)	0.7" (18 mm)	3.5" (90 mm)	0.13" (3.3 mm)	0.7"~1.2" (18~30 mm)
JA-HSC-40	1.6" (40 mm)	0.8" (20 mm)	3.5" (90 mm)	0.13" (3.3 mm)	0.8"~1.4" (20~35 mm)
JA-HSC-55	2.2" (55 mm)	1.1" (28 mm)	4.5" (115 mm)	0.13" (3.4 mm)	1.1"~1.8" (28~45 mm)
JA-HSC-75	3" (75 mm)	1.6" (40 mm)	4.9" (125 mm)	0.15" (3.8 mm)	1.6"~2.6" (40~65 mm)
JA-HSC-100	3.9" (100 mm)	2" (50 mm)	5.5" (140 mm)	0.16" (4 mm)	2"~3.5" (50~90 mm)
JA-HSC-120	4.7" (120 mm)	2.8" (70 mm)	6.1" (155 mm)	0.16" (4 mm)	2.8"~4.3" (70~110 mm)
JA-HSC-140	5.5" (140 mm)	3.5" (90 mm)	7.1" (180 mm)	0.16" (4 mm)	3.5"~5.1" (90~130 mm)
JA-HSC-200	7.9" (200 mm)	4.3" (110 mm)	10.6" (270 mm)	0.17" (4.2 mm)	4.3"~7.1" (110~180 mm)
JA-HSC-250	9.8" (250 mm)	4.7" (120 mm)	10.6" (270 mm)	0.17" (4.2 mm)	4.7"~9.4" (120~240 mm)



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

3115 Fry Road Ste 303, Katy, Texas
77449, United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland
SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex
Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn