




PERFORATED PVC VENT PIPE



CELEBRATED ENTERPRISE IN CATHODIC PROTECTION

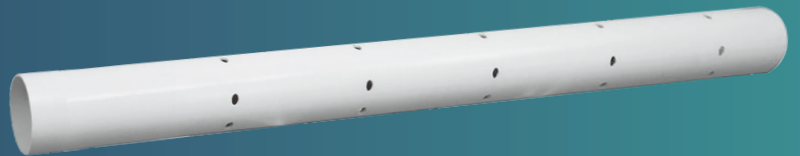


PERFORATED PVC VENT PIPE

DATA SHEET

Cathodic protection deep well anode systems operate at a relatively high output, providing protection over a broad area. Large amounts of chlorine gas are generated from the dissolution of naturally occurring salts in the soil. If this system is not vented properly, chlorine gas build up can erode the insulation on the header cable resulting in a premature system failure.

To tackle this problem, ventilation pipes are widely used to displace chlorine gas generated by the discharge of DC current from the impressed current anodes. The vent pipe is commonly centered in the active area allowing chlorine gas to escape into atmosphere.

Vent Pipes are made from high quality polyvinyl chloride (PVC) resin. The pipes can be perforated with relatively large diameter holes and covered by a layer of geotextile fabric which greatly enhances the venting capability of the pipe.

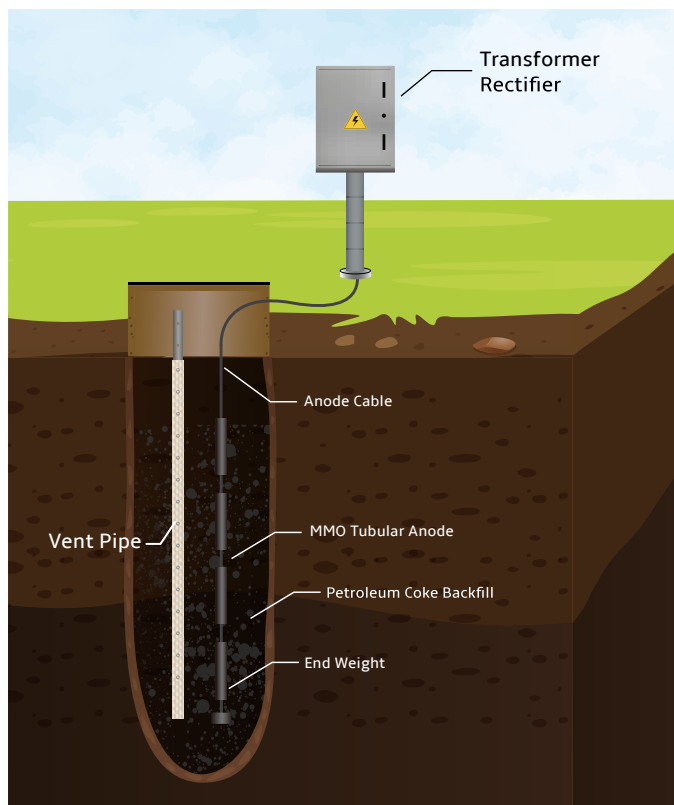

SPECIFICATION

Item No.	Outer Diameter	Wall Thickness	Vent Hole Diameter	Hole Spacing
JA-PVP-50	2" (50 mm)	0.09" (2.4 mm)	1/16" (1.6 mm)	6" (152 mm)
JA-PVP-100	2" (50 mm)	0.09" (2.4 mm)	1/8" (3.2 mm)	6" (152 mm)



Worldwide Service Network

Our worldwide network of sales and service centers can provide immediate advice and assistance on the complete range of products.

Global Headquarter

2417 Katy Fort Bend Road,
Katy, Texas 77493
United States

Email: sales@jenningsanodes.com
Tel: +1 (281) 501 8398 / +1 (713) 799 3884

www.jenningsanodes.com

UK Office

Tatham Street, Hendon, Sunderland
SR1 2AG, United Kingdom

Email: sales@jenningsanodes.co.uk
Tel: +44 (0) 191 510 8843
Fax: +44 (0) 191 514 7749

www.jenningsanodes.co.uk

Asia Pacific Office

120 Lower Delta Road, #07-13 Cendex
Centre, Singapore 169208

Email: inquiries@jenningsanodes.com
Tel: +65 6715 1514



View Our Website



Follow Us On LinkedIn